5 staggered rows of six holes each
hexagonal (i.e. equilateral triangle)
spacing → 30 holes

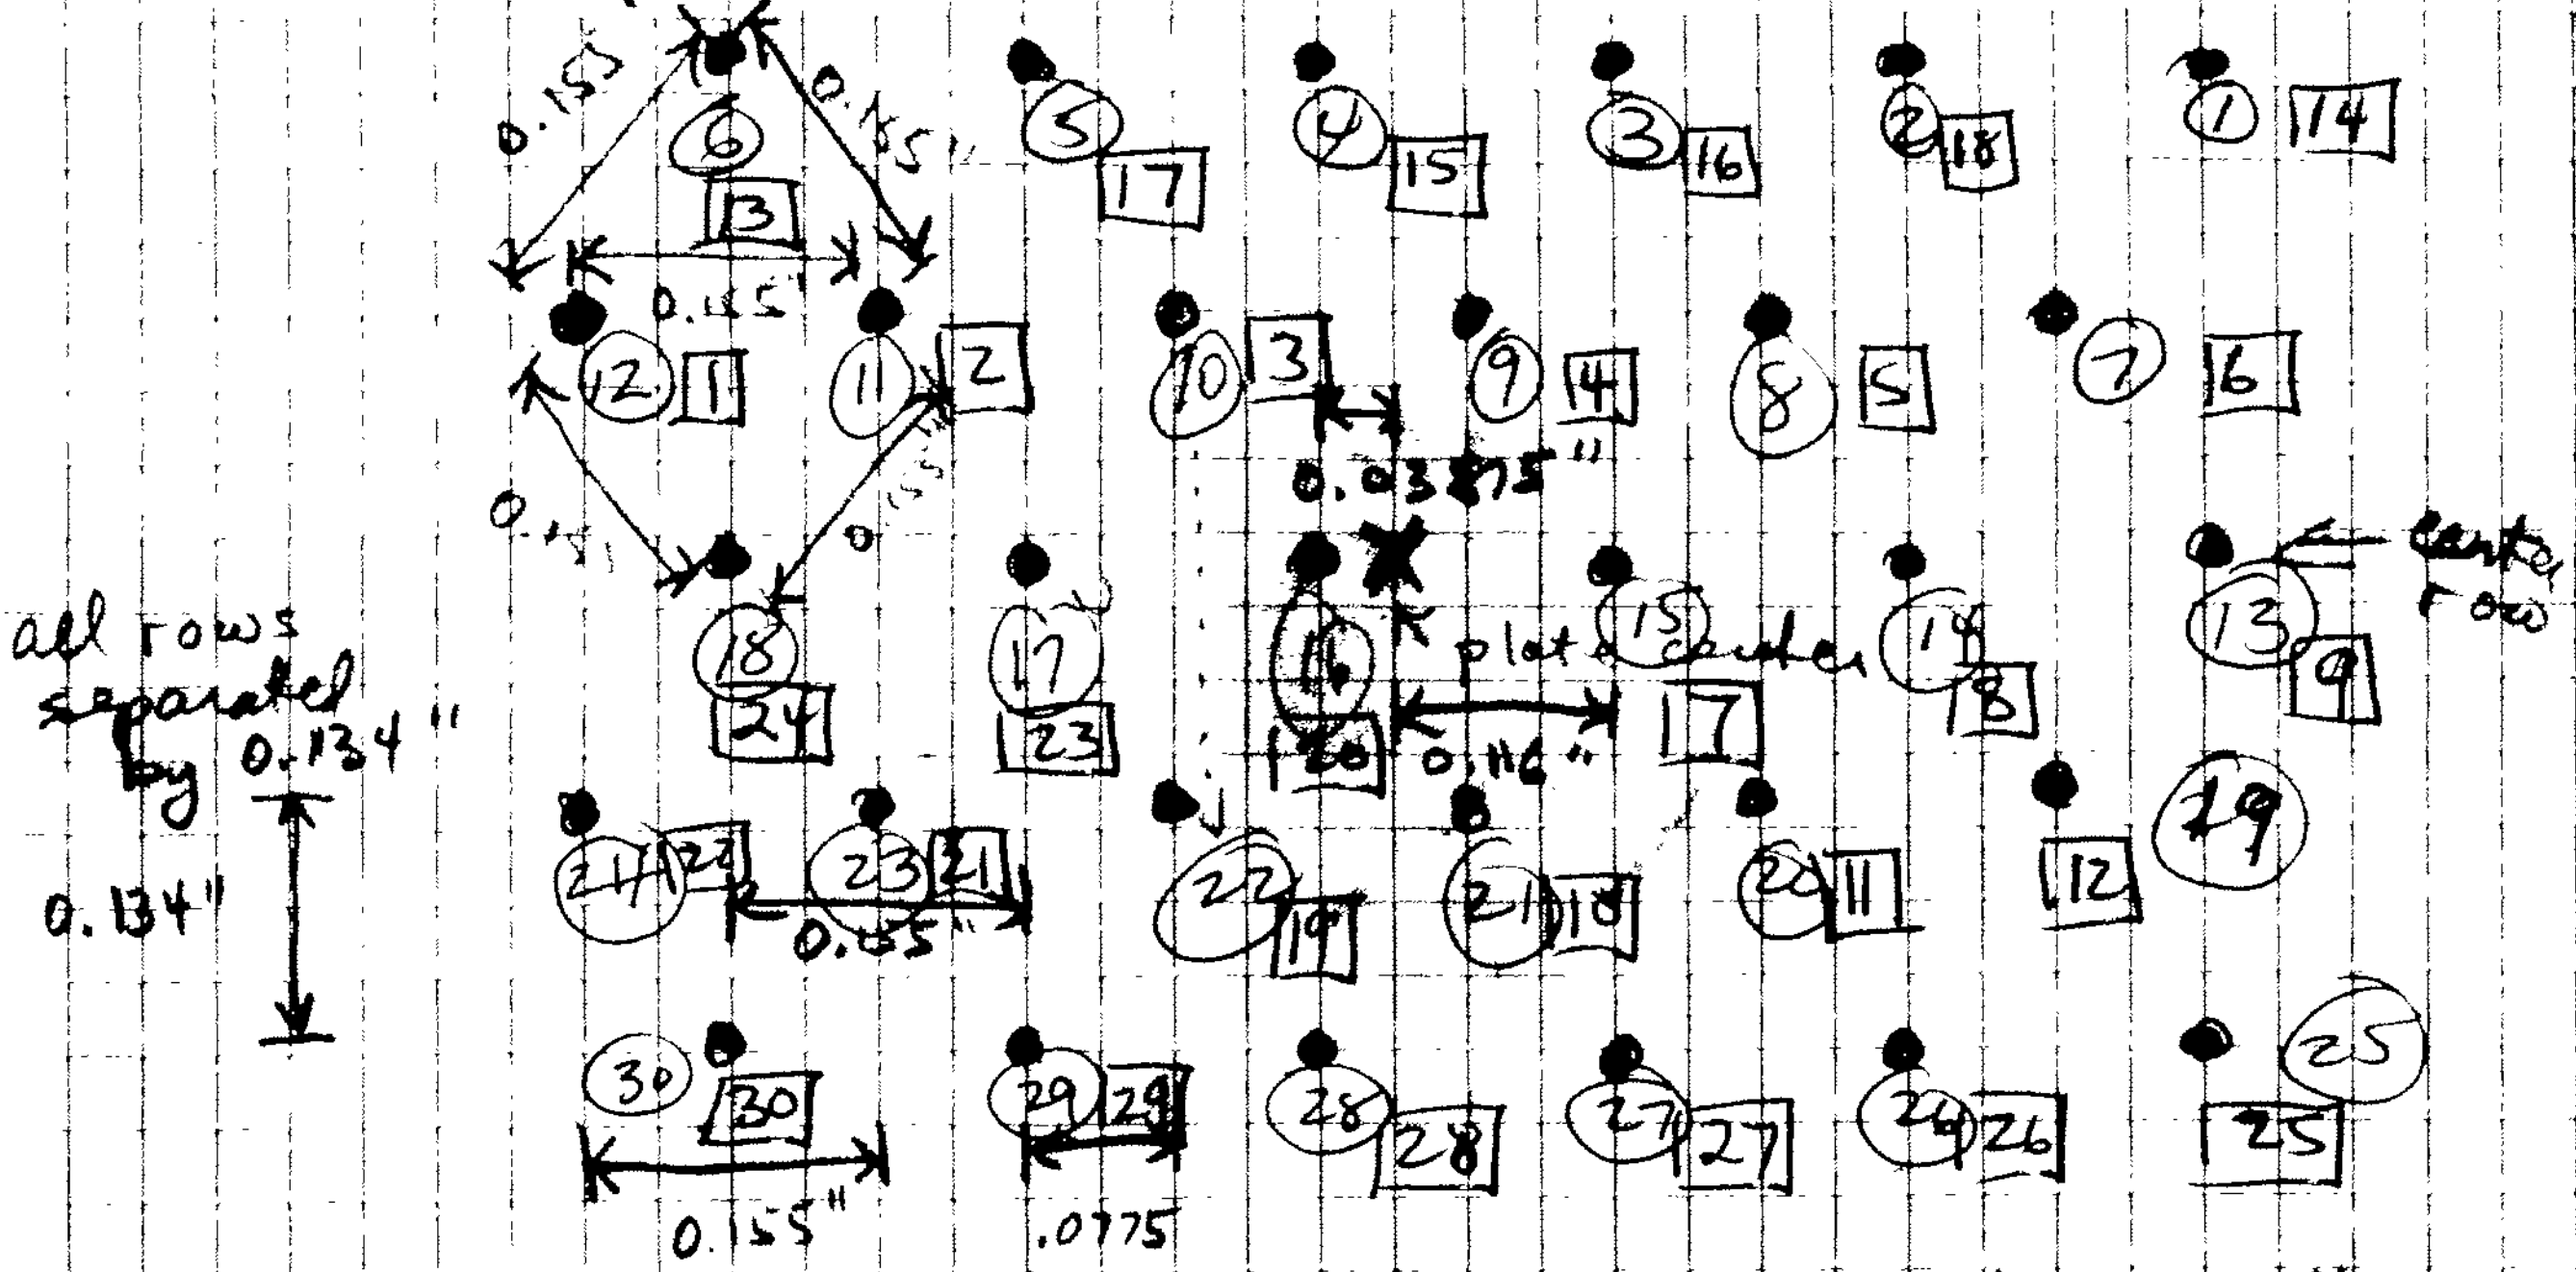

~~(center of plate is in middle row, but 1/4 of the way from third to fourth hole in that row to put in center of hole pattern)~~

□ = fiber
O = hole

172#/mm

fibers are 120 microns in diameter

All holes separated by 0.155" from each other. Hole diameters to hold ferrules. Plate thickness to match ferrule depth

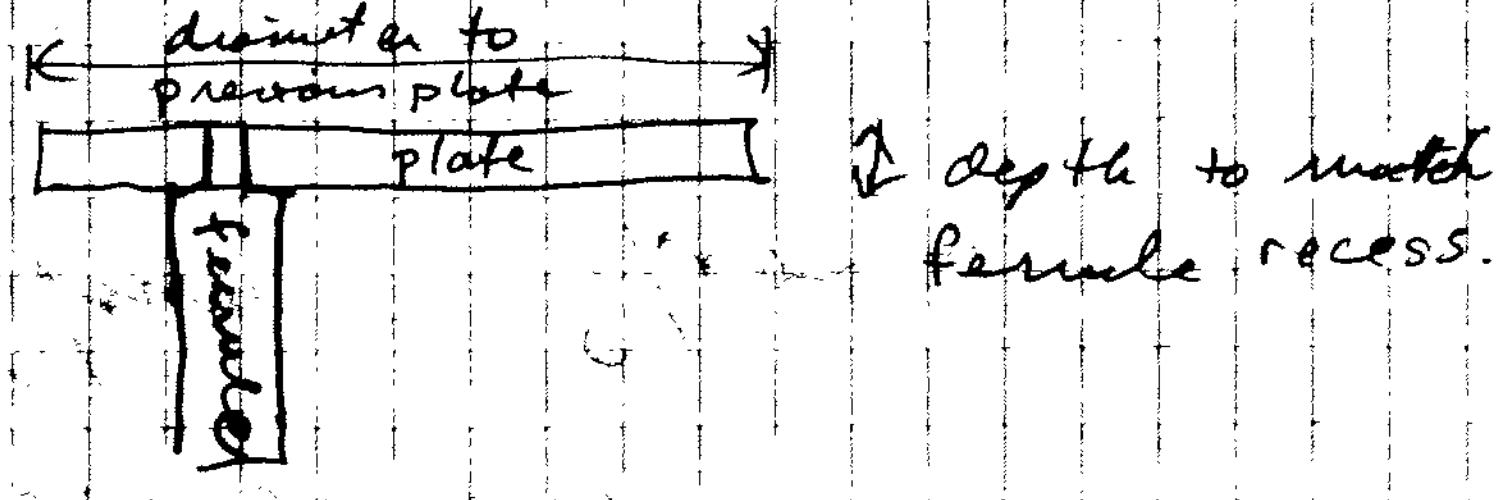

1212011